

06/21/99



jc662 U.S. PTO

Please type a plus sign (+) inside this box → ☒PTO/SB/05 (12/97)
Approved for use through 09/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 CFR 1.53(b))	Attorney Docket No.	P2341	Total Pages	18
	First Named Inventor or Application Identifier			
	Cheshire			
	Express Mail Label No.	EL339226737US		

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
---	---

<p>1. <input checked="" type="checkbox"/> Fee Transmittal Form (Submit an original, and a duplicate for fee processing)</p> <p>2. <input checked="" type="checkbox"/> Specification [Total Pages <input]<br="" type="text" value="10"/>(preferred arrangement set forth below)</p> <ul style="list-style-type: none">- Descriptive title of the Invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the Invention- Brief Summary of the Invention- Brief Description of the Drawings (if filed)- Detailed Description- Claim(s)- Abstract of the Disclosure <p>3. <input checked="" type="checkbox"/> Drawing(s) (35 USC 113) [Total Sheets <input]<="" p="" type="text" value="3"/><p>4. Oath or Declaration [Total Pages <input]<="" p="" type="text" value="2"/><p>a. <input checked="" type="checkbox"/> Newly executed (original or copy)</p><p>b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed) [Note Box 5 below]</p><p>i. <input type="checkbox"/> <u>DELETION OF INVENTOR(S)</u> Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).</p><p>5. <input type="checkbox"/> Incorporation By Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</p></p></p>	<p>6. <input type="checkbox"/> Microfiche Computer Program (Appendix)</p> <p>7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)</p> <p>a. <input type="checkbox"/> Computer Readable Copy</p> <p>b. <input type="checkbox"/> Paper Copy (identical to computer copy)</p> <p>c. <input type="checkbox"/> Statement verifying identity of above copies</p>
---	--

ACCOMPANYING APPLICATION PARTS	
8. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s))	
9. <input type="checkbox"/> 37 CFR 3.73(b) Statement (when there is an assignee) <input checked="" type="checkbox"/> Power of Attorney	
10. <input type="checkbox"/> English Translation Document (if applicable)	
11. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations	
12. <input type="checkbox"/> Preliminary Amendment	
13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)	
14. <input type="checkbox"/> Small Entity Statement filed in prior application, Status still proper and desired	
15. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)	
16. <input type="checkbox"/> Other: _____	

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____/_____

18. **CORRESPONDENCE ADDRESS**

☐ Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here) or ☒ Correspondence address below

NAME	Mark A. Aaker				
	Apple Computer, Inc				
ADDRESS	1 Infinite Loop, M/S 38-PAT				
CITY	Cupertino	STATE	CA	ZIP CODE	95014
COUNTRY	USA	TELEPHONE	408-974-4347	FAX	408-974-5436

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Attorney Docket No.: P2341

UNITED STATES PATENT APPLICATION for:

**IMPROVED SOCKET CONNECTOR HAVING A FLEXIBLE INTERNAL
BARRIER TO PREVENT INCORRECT INSERTION OF SMALLER SIZED
PLUGS**

Inventor:

Stuart Cheshire

Prepared by:

Mark A. Aaker

APPLE COMPUTER, INC.

1 Infinite Loop, 38-PAT

Cupertino, California 95014

(408) 974-4347

EXPRESS CERTIFICATE OF MAILING(37 C.F.R. § 1.10)

"Express Mail" mailing label number: **EL339226737US**

I hereby certify that this paper or fee is being deposited with the United States Postal Service

"Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Box Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

June 21, 1999

Sharon Friesen

Sharon Friesen

Date of Deposit

Name of Person Mailing Correspondence

Signature

Field of the Invention

This invention relates to an electrical socket connector designed to prevent the improper insertion of smaller sized plug connectors.

Background of the Invention

Today, telephone and communication connections of many kinds are commonly made using molded plastic modular connectors in standard shapes and sizes. Quite often there is a "family" of connectors having a similar shape, but with different sizes, widths or numbers of electrical contacts. While a larger or wider plug connector cannot be incorrectly inserted into a smaller or narrower socket, the reverse is not always true. A smaller or narrower plug connector can often be incorrectly inserted into a larger or wider socket, and the expected connection and functioning will not occur, and electrical or mechanical damage may occur. What is desired is an electrical socket connector designed to prevent the improper insertion of smaller sized plug connectors.

Summary of the Invention

This invention provides an electrical socket connector having a flexible internal barrier designed to prevent the improper insertion of smaller sized plug connectors. In a preferred form, two flexible internal barriers are used, one on each side of the socket entry leading into the socket cavity. A flexible internal barrier is composed of a flexible ramp fixedly attached at the socket entry which extends a movable end into the socket cavity. The movable end is attached to a vertical barrier, which moves with the inner end of the flexible ramp. The insertion of a correctly sized wide plug will engage the sides of the plug with the flexible ramp, riding along and moving the flexible ramp so the the vertical barrier is moved out of its stopping position, allowing the plug to pass the vertical barrier and to be fully and properly seated in the cavity. The insertion of a incorrectly sized narrow plug will fail to engage and move the flexible ramp, leaving the vertical barrier in its stopping position, and preventing the narrow plug from being inserted into the socket cavity past the vertical barrier. In particular, this invention can be used to provide an improved RJ45 network socket which prevents the incorrect insertion of a smaller sized RJ11 telephone plug.

Brief Description of the Drawings

Figure 1 provides a perspective view of a standard RJ45 8 pin plug and socket.

Figure 2 provides a perspective view of the doorway or entry frame leading into the socket cavity of an improved socket connector having a flexible internal barrier to prevent incorrect insertion of smaller sized plugs in accordance with this invention.

Figure 3 provides a side view of the doorway or entry frame for an improved socket connector having a flexible internal barrier to prevent incorrect insertion of smaller sized plugs in accordance with this invention.

Detailed Description of a Preferred Embodiment

Today, most telephones, and telephone-related equipment such as answering machines and modems, provide for connection to the standard telephone network through a 4 pin socket known as an RJ11 socket. The connection is made by the consumer with a short jumper cable of unshielded wire terminated at each end with a 4 pin molded plastic RJ11 plug. The characteristics of these RJ11 plugs and sockets are described in Subpart F of the Federal Communications Commission Rules and Regulations Part 68.500. The RJ11 has 6 contact positions, but usually only 4 connecting pins are used. These RJ11 plugs will be called "telephone" plugs.

Also today, many computer systems provide for connection to a local area network through an 8 pin socket known as an RJ45 socket. The connection is made by the computer owner or their network administrator with a short jumper cable of unshielded wire terminated at each end with an 8 pin molded plastic RJ45 plug. Figure 1 provides a perspective view of a standard RJ45 8 pin plug and socket. The RJ45 has 8 contact positions, and connecting pins are usually used in all 8 positions. The specific characteristics of these RJ45 plugs and sockets are described in the IEEE Specification 802.3 for networking over unshielded twisted pair wire,

known as 10BASE-T and 100BASE-T, and in the EIA/TIA-568B RJ-45 Wiring Scheme. These RJ45 sockets will be called “network” sockets.

Referring to Figure 1 for the identification numerals, an RJ45 plug 11 is commonly made of clear molded plastic, with a row of metal contacts 14 on the top side, and a flexible plastic tab 16, also known as the “plug latching bar”, on the bottom side. In practice, the top and bottom orientations can be varied, but will be used consistently in this specification.

Referring again to Figure 1, an RJ45 socket 12 is commonly designed to be exposed on the outer enclosure surface of the telephone or computer equipment, and is usually made of molded plastic, with a cavity having within it a row of metal electrical contacts 18 on a top side, and a notch 19 for receiving the flexible plastic tab 16 of a plug 11 on the bottom side. The engagement of the flexible plastic tab 16 with the notch 19 aligns the plug 11 with the socket 12 and allows it to latch into place. The user can depress the flexible plastic tab 16 to release the plug 11 from the socket 12.

The RJ11 telephone plugs and sockets are slightly narrower than the RJ45 network plugs and sockets. A common mistake is for a computer user to insert a narrow RJ11 telephone plug into the wider RJ45 network socket. The plug may appear to properly match due to a similar shape and outline, the small friction between the parts, and the flexible plastic tab may become latched into place. However, a close examination would reveal that the narrow RJ11 plug is only loosely held within the wider RJ45 socket. The 4 pin RJ11 and 8 pin RJ45 electrical contacts will not properly match, and the expected network or telephone functions will not work. Indeed, equipment damage may occur as incorrect electrical contacts or short circuits are intermittently made, or if bending of the contact pins occurs as the narrow plug is shifted or skewed in its improper socket. For example, when an RJ11 plug is put into an RJ45 socket, the two edge contacts on the socket are bent out of the way by the plastic edges of the RJ11. This can lead to the contacts becoming permanently deformed, so that they will no longer make good contact with an RJ45 plug. A user who damages their RJ45 socket in this way may later try to use a proper RJ45 plug, but find that the connection is incomplete or unreliable, and that the networking functions will not operate.

While clear marking and labeling of the plugs and sockets can reduce these problems, what is desired is an RJ45 socket which prevents the improper insertion of the smaller RJ11 plug.

Figure 2 provides a perspective view of the doorway or entry frame leading into the socket cavity of an improved socket connector having a flexible internal barrier to prevent incorrect insertion of smaller sized plugs in accordance with this invention.

The doorway or entry frame 22 would be exposed on the outer enclosure surface of the equipment, and would provide the opening through which a plug would be inserted into a socket cavity behind the entry frame 22. The entry frame 22 provides an opening in a shape to match the appropriate plug, including a notch 19 for receiving the flexible plastic tab of a plug. Other socket details such as the back of the socket cavity, contact pins, mounting tabs, and electrical connections are eliminated from Figure 2 in order to highlight the specific inventive features. The remainder of the socket is constructed or assembled using known industry standard techniques which will not be fully discussed here.

The inventive feature of the flexible internal barrier can be built onto the interior cavity walls, or as in this described preferred embodiment, onto the entry frame 22. The use of the entry frame 22 allows the invention can be more easily applied to current socket designs, or the invention can be incorporated into a new socket design with minimal changes to the other conventional socket parts.

In a preferred form, two flexible internal barriers 24 are used, one on each side of the entry frame leading into the socket cavity. A flexible internal barrier 24 is composed of a flexible ramp 26 fixedly attached at the entry frame 22 which extends a movable end into the socket cavity. The movable end is attached to a vertical barrier 28, which moves with the inner end of the flexible ramp 26. When the flexible ramp 26 is not flexed, the vertical barrier 28 remains in a central stopping position which would prevent a plug from moving past it further into the socket cavity. When the flexible ramp 26 is flexed, the vertical barrier 28 will be moved away from the central stopping position to such a degree that a plug can be moved past it further into the socket cavity.

Figure 3 provides a side view of the doorway or entry frame for an improved socket connector having a flexible internal barrier to prevent incorrect insertion of smaller sized plugs in accordance with this invention. The flexible internal barrier 24 is composed of a flexible ramp 26 fixedly attached at the entry frame 22 which extends a movable end into the socket cavity. When the flexible ramp 26 is flexed by the insertion of a plug which engages the flexible ramp 22, the vertical barrier 28 is moved downward out of the central stopping position and the plug can be moved past it further into the socket cavity.

Since the entry frame 22 the flexible internal barrier 24, the flexible ramp 26, and the vertical barrier 28 can be implemented simply in plastic molding, the additional manufacturing cost, if any, is small. The flexible ramp 26 can be molded with similar flexible characteristics to the flexible plastic tab 16 used on a plug.

In operation, the insertion of a correctly sized wide plug 11 will engage the flexible ramp 26, riding along and moving the flexible ramp 26 so that the vertical barrier 28 is moved downward out of the central stopping position, allowing the correctly sized wide plug 11 to be fully and properly seated in the cavity. For example, when an RJ45 network plug is inserted into such an improved RJ45 network socket, it is wide enough to reach the edges, so it presses against the ramps, bending the ramps and vertical barriers out of the way so that the plug can go all the way into the socket cavity and lock into place properly.

Conversely, the insertion of a incorrectly sized narrow plug will fail to engage the ramps, will not move the ramps, and will leave the vertical barriers in the central stopping positions, where they prevent the incorrectly sized narrow plug from being fully inserted into the socket cavity. For example, when an RJ11 telephone plug is inserted into such an improved RJ45 network socket, the plug is too narrow to reach the edges, will not engage or move the ramps, and the vertical barriers will remain in the central stopping positions, which will prevent the narrow RJ11 telephone plug from going further into the RJ45 network socket cavity.

With this improved RJ45 network socket, the narrow RJ11 telephone plug will still go part of the way into the socket before it is blocked by the

vertical barriers, but it will not go nearly far enough to lock into place, and will tend to fall out as soon as the user lets go of it, giving the user a clear indication that something is not correct. This should prompt most users to look a little more closely at what they are doing, and notice that they may be trying an incorrect plug and socket combination. Carefully designed, the length of the flexible ramp to the vertical barrier can be short enough that a narrow plug will be stopped only a few millimeters into the socket, which will reliably prevent incorrect insertions, incorrect electrical contact, or mechanical damage to the socket contacts.

Other variations will be apparent to one skilled in the art from a consideration of the preceding description. For example, the improvement could be used with other modular connectors which have large and small size connectors which can be incorrectly matched. The flexible internal barrier can be formed entirely across one side of the entry frame, entirely across a side of the socket cavity, or used on multiple sides of either. The flexible ramp could be formed of a beam, crossbar, or tab disposed so as to be engaged and flexed by the insertion of a correctly sized plug. It is intended that the scope of the invention should be limited only as set forth in the claims which follow.

Claims

What is claimed is:

1. An improved socket connector having a flexible interior barrier to prevent incorrect insertion of a smaller sized plug, the socket having a socket entry and a socket cavity for receiving a correctly sized plug, the flexible internal barrier comprising:

a flexible ramp fixedly attached at one end to the socket entry, and which extends an other movable end into the socket cavity;

a vertical barrier attached to the movable end, which moves with the movable end of the flexible ramp, the vertical barrier being in a central stopping position when the correctly sized plug is not inserted and the flexible ramp is not moved, and the vertical barrier being moved away from the central stopping position when the correctly sized plug is inserted which engages and moves the flexible ramp.

2. An improved socket connector as in claim 1, where the socket is an RJ45 network socket, the correctly sized plug is an RJ45 network plug and the smaller sized plug in an RJ11 telephone plug.

3. An improved socket connector having a flexible interior barrier to prevent incorrect insertion of a incorrectly sized narrow plug, the socket having a socket entry and a socket cavity for receiving a correctly sized wide plug, the flexible internal barrier comprising;

at two opposite sides of the socket cavity, a flexible ramp having one end fixedly attached at the entry and which extends a second movable end into the socket cavity, the movable end further having a vertical barrier which moves with the movable end of the flexible ramp, the flexible ramp and vertical barrier configured such that the insertion of the correctly sized wide plug will engage a side of the plug with the flexible ramp, riding along and moving the flexible ramp so that the vertical barrier is moved out of a stopping position, and allowing the correctly sized wide plug to pass the vertical barrier and to be fully and properly seated in the socket cavity, but further configured such that the insertion of the incorrectly sized narrow plug will fail to engage a side of the plug with the flexible ramp, leaving the vertical barrier in its stopping position, and preventing the incorrectly sized narrow plug from being further inserted into the socket cavity past the vertical barrier.

4. An improved socket connector as in claim 3, where the improved socket connector is an RJ45 network socket , the correctly sized wide plug is an RJ45 network plug, and the incorrectly sized narrow plug is an RJ11 telephone plug.

Abstract

An improved socket connector has flexible interior barriers to prevent incorrect insertion of smaller sized plugs, where a flexible internal barrier is formed on a side of the socket entry leading into the socket cavity, and is composed of a flexible ramp attached from the socket entry, the ramp extending into the socket cavity and having a inner movable end with a vertical barrier, sized and disposed within the socket cavity so that the insertion of a correctly sized wide plug will engage the flexible ramp, riding along and moving the flexible ramp so that the vertical barrier is moved out of a stopping position, allowing the correctly sized wide plug to be fully and properly seated in the cavity, but further sized and disposed within the socket cavity so that the insertion of an incorrectly sized narrow plug will fail to engage the ramp, will not flex the ramp, and will leave the vertical barrier in the stopping position, where it prevents the incorrectly sized narrow plug from being fully inserted into the socket cavity. The improved socket can be an RJ45 network socket, the correctly sized wide plug can be an RJ45 network plug, and the incorrectly sized narrow plug can be an RJ11 telephone plug.

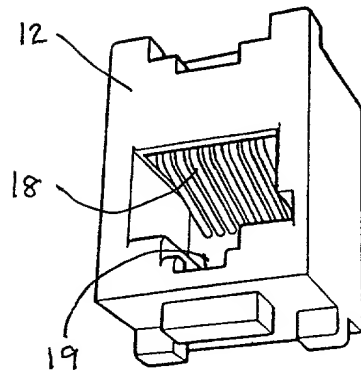
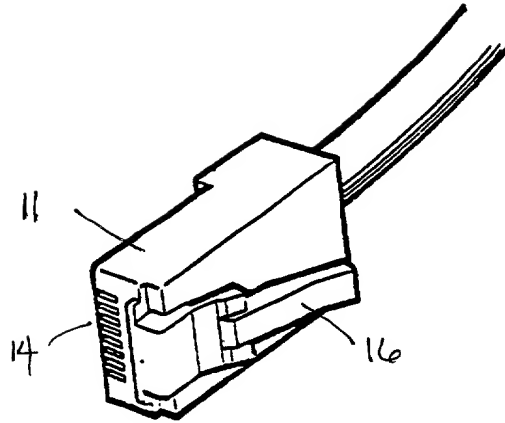


FIG. 1 (PRIOR ART)

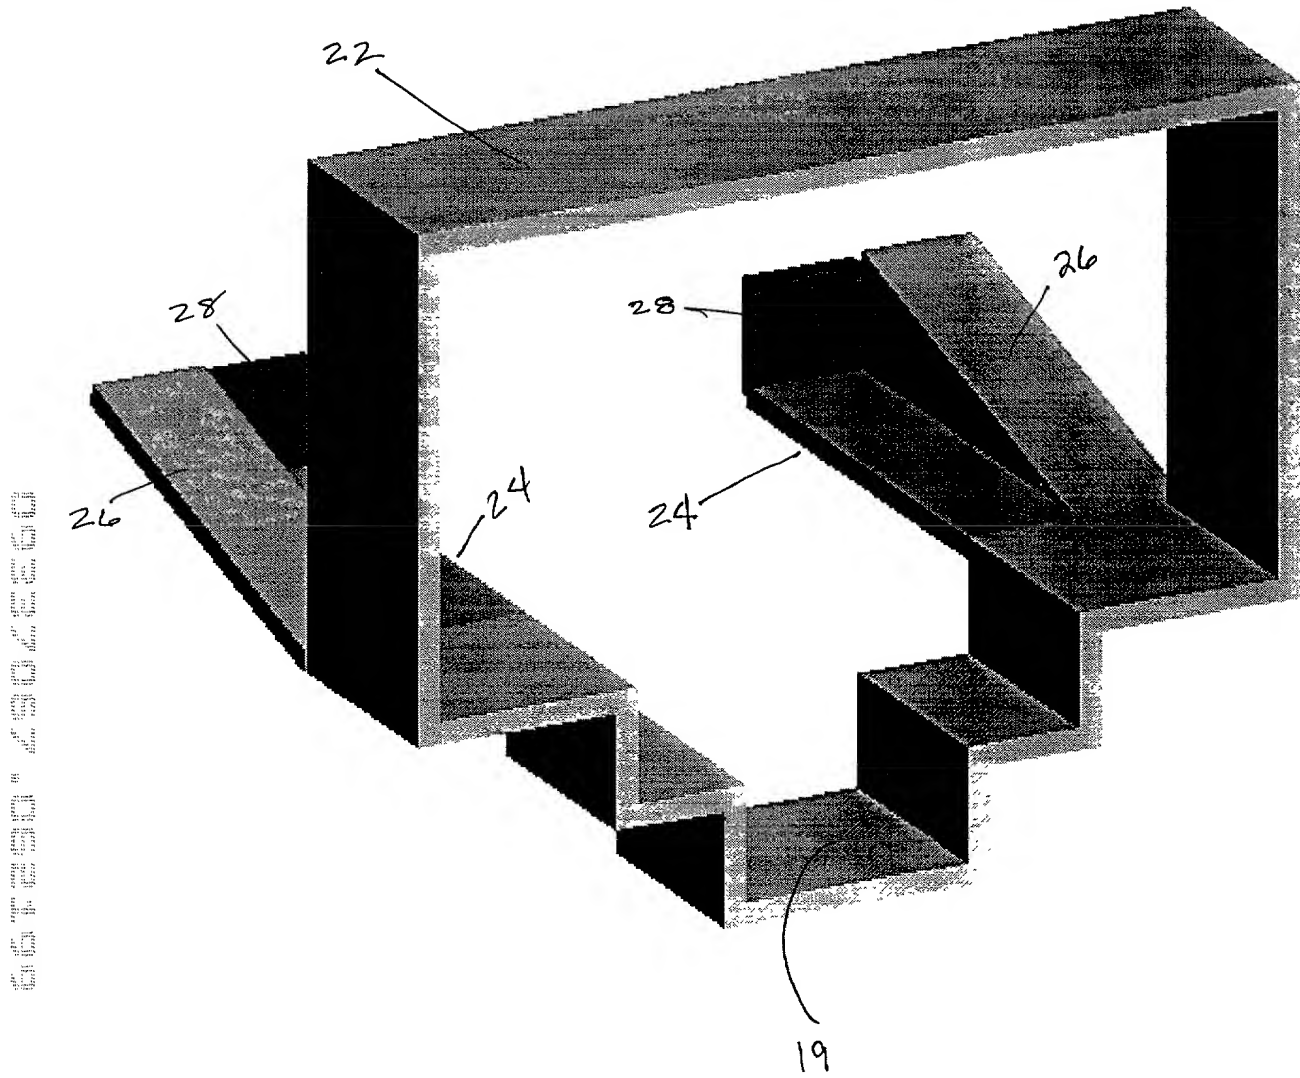


FIG. 2

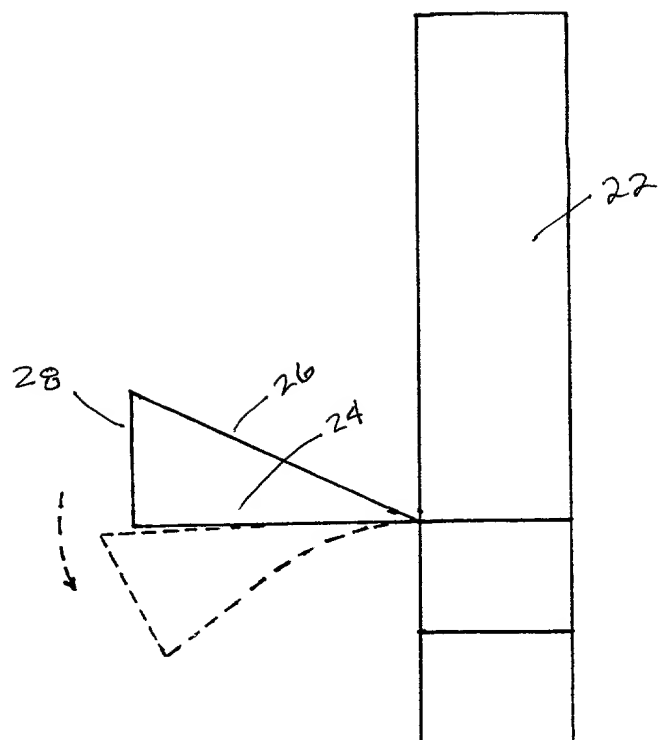


FIG. 3

DECLARATION AND POWER OF ATTORNEY FOR DESIGN PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

IMPROVED SOCKET CONNECTOR HAVING A FLEXIBLE INTERNAL BARRIER TO PREVENT INCORRECT INSERTION OF SMALLER SIZED PLUGS

the specification of which

X is attached hereto.

_____ was filed on _____ as

Application Serial No.

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I do not know and do not believe that the same was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and said invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119, of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

(Number)

(Country)

(Day/Month/Year Filed)

Yes

No

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) or Section 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)

(Filing Date)

(Status -- patented, pending, abandoned)

I hereby appoint as my attorneys, Mark Aaker, Reg. No. 32,667; Albert P. Cefalo, Reg. No. 27,315; Richard Liu, Reg. No. 34,377; Edward W. Scott, IV, Reg. No. 36,000; Nancy R. Simon, Reg. No. 36,930; and Helene Plotka Workman, Reg. No. 35,981; of **APPLE COMPUTER, INC., located at 1 Infinite Loop, M/S: 38-PAT, Cupertino, California 95014, telephone (408) 974-9453, facsimile (408) 974-5436**, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: **Stuart D. Cheshire**

Inventor's Signature  Date 18th June 1999

Residence: 1436 Rosecrest Terrace, San Jose, CA 95126 Citizenship: United Kingdom

Post Office Address: Same